


Dutch Door - Optional Lock Preparation

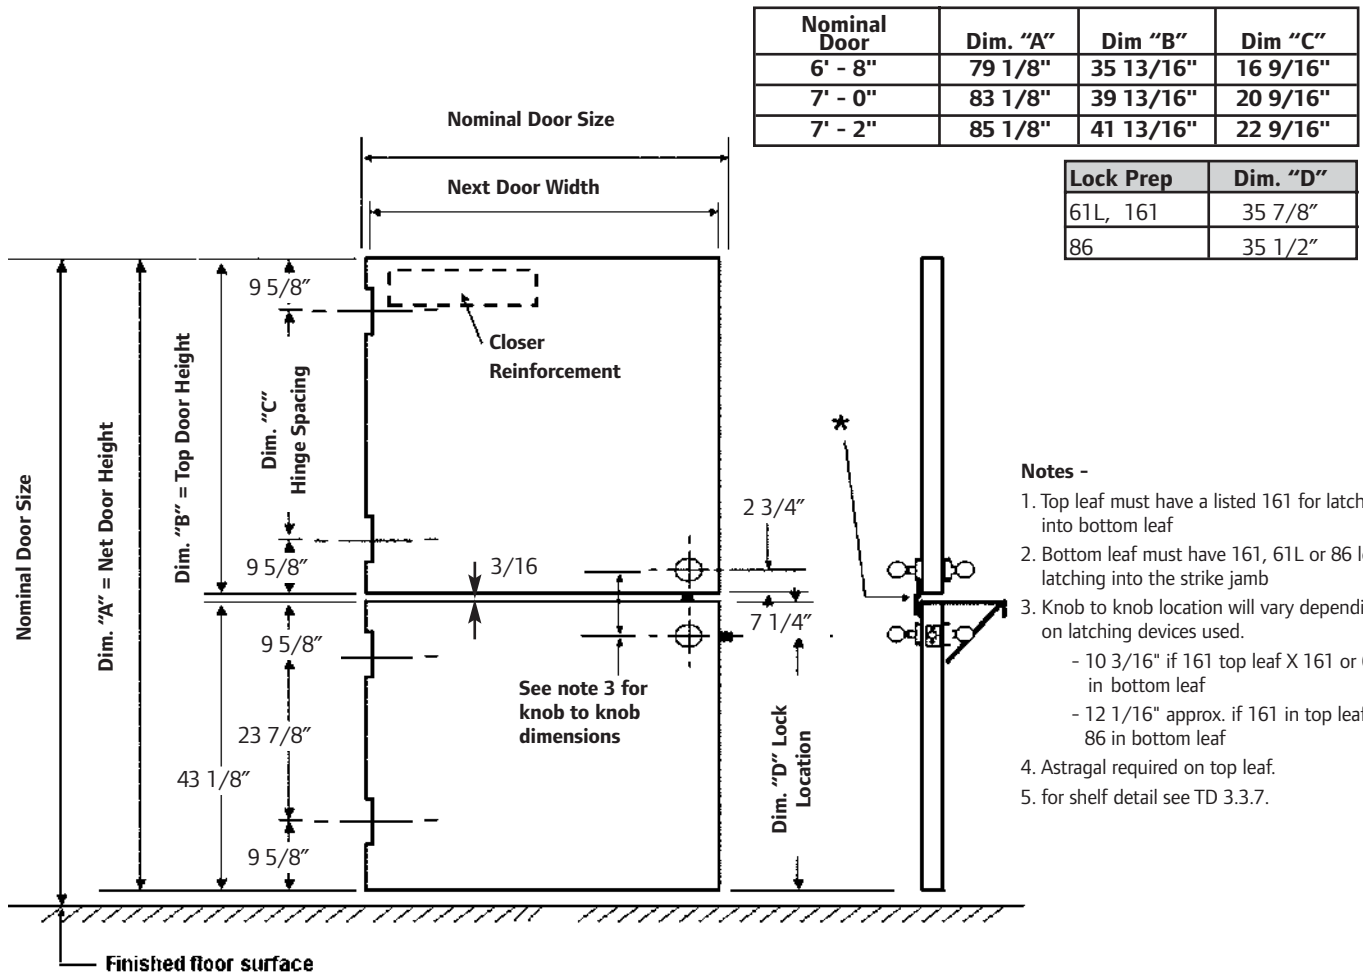

PURPOSE:

In the interest of expedient transition through the path of the means of egress, a single lock operation of latch bolt retraction becomes paramount. By choosing this preparation, the only lock operation required to retract the latch bolt is found at the standard lock location on the bottom leaf.

APPLICATION:

Labeled and non-labeled fire rated Dutch Door assemblies

This alternative lock preparation combination is Fire Rated up to 3 hours. The top leaf is limited to a Government 161 lock preparation. The bottom leaf may be prepared for a Government 86, 61L or 161 lock. The latch bolt of the lock in the top leaf projects into a cylindrical strike attached to the strike preparation in the top of the bottom leaf, eliminating one strike preparation in the jamb. This optional lock preparation must be specified when ordering.

PRODUCT AVAILABILITY:

This lock preparation is available on Steelcraft L and B Series Steel Stiffened doors for non-label, or for labeled openings up to 3 hour Fire Ratings. See the Fire Rated Products Section for additional information.